

Description

- For 1/4" x 1-1/4" (6.35mm x 31.8mm) fuses
- Waterproof for exposed locations
- Accepts #16 to #12 copper wire
- Copper crimp lead material
- Recommended crimp tools:
 - Thomas & Betts – WT-112M
 - Thomas & Betts – ERG-2002
 - Channelock No. 909
- High temperature, flame retardant, phenolic meets UL 94 HB
- Crimp or 1/4" quick connect terminals
- In-line connection

Agency Information

- UL Recognized: (IZLT2, E14853) HFA recognized with use of No. 12 AWG copper conductors secured with Thomas & Betts crimping tool WT-180
- HFA-HH not UL Recognized

Environmental Data

- Temperature Rating (RTI): 150°C


Ordering

- Specify packaging, product, and option code



Dimensions

Drawing Not to Scale

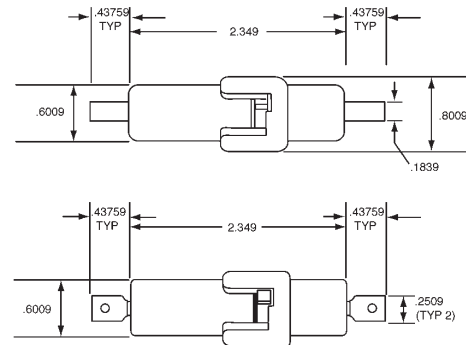

Component	Material
Body	Phenolic
Crimp	Copper, Tin-Plated

SPECIFICATIONS			
Product Code	Voltage Rating	Current Rating	Terminal
HFA	250V	20A	Crimp
HFA-HH	250V	20A	1/4 Quick Connect

PACKAGING CODE	
Packaging Code	Description
Blank	10 pieces of fuseholders packed into a carton
BK	20 pieces of fuseholders packed into a carton

OPTION CODE	
Option Code	Description
-R	RoHS compliant version